

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
29 March 2001 (29.03.2001)

PCT

(10) International Publication Number
WO 01/021935 A1

(51) International Patent Classification⁷: **E21B 34/10**

(21) International Application Number: PCT/US00/26178

(22) International Filing Date:
22 September 2000 (22.09.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/155,866 24 September 1999 (24.09.1999) US
Not furnished 21 September 2000 (21.09.2000) US

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant: **SCHLUMBERGER TECHNOLOGY CORPORATION** [US/US]; 14910 Airline Road, Rosharon, TX 77583-1590 (US).

Published:
— with international search report

(72) Inventors: **MCLOUGHLIN, Eugene, P.**; 8380 El Mundo, Houston, TX 77054 (US). **RUBINSTEIN, Scott, A.**; 2800 Mustang Road #702, Alvin, TX 77511 (US). **MARTINEZ, Ricardo**; 1400 Wood Hollow #8716, Houston, TX 77057 (US). **KOSMALA, Alexandre, G., E.**; 305 Detering Street, Houston, TX 77007 (US).


(48) Date of publication of this corrected version:
3 October 2002

(15) Information about Correction:
see PCT Gazette No. 40/2002 of 3 October 2002, Section II

(74) Agent: **CASTANO, Jaime, A.**; Schlumberger Technology Corporation, P.O. Box 1590, Rosharon, TX 77583-1590 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: VALVE FOR USE IN WELLS

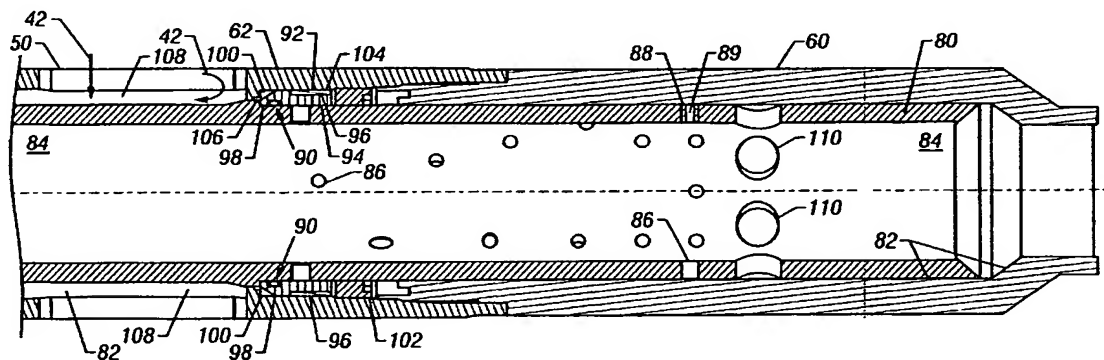

(57) Abstract: A valve assembly (30) to control the intake of fluid. The valve assembly has a valve body and a valve choke (80) disposed therein. The valve choke has a choke bore (84) through the interior of the valve choke. The valve choke has a plurality of orifices (86) to the choke bore spaced at intervals along the valve choke. A seal is disposed between the valve body and valve choke. The valve system is operable to position the valve choke so that the seal (90) is positioned between the valve body and the valve choke at the intervals between the plurality of orifices.

WO 01/021935 A1

VALVE FOR USE IN WELLS

BACKGROUND OF THE INVENTION

This application claims priority based on
5 Provisional Application No. 60/155866, filed in the
United States on September 24, 1999.

1. Field Of The Invention

10 The present invention relates to the field of flow
control. More specifically, the invention relates to a
device and method for controlling the flow of fluids in a
wellbore that, in one embodiment, provides for full
tubing flow.

15 2. Background Of The Related Art

The economic climate of the petroleum industry
demands that oil companies continually improve their
recovery systems to produce oil and gas more efficiently
and economically from sources that are becoming
20 increasingly difficult to exploit without increasing the
cost to the consumer. One successful technique currently
employed is the drilling of deviated wells, in which a
number of horizontal wells are drilled from a central
vertical borehole. In such wells, and in standard
25 vertical wells, the well may pass through various
hydrocarbon bearing zones or may extend through a single
zone for a long distance. One method to increase the
production of the well is to perforate the well in a
number of different locations, either in the same
30 hydrocarbon bearing zone or in different hydrocarbon
bearing zones, and thereby increase the flow of
hydrocarbons into the well.

One problem associated with producing from a well in this manner relates to the control of the flow of fluids from the well and to the management of the reservoir. For example, in a well producing from a number of
5 separate zones (or from laterals in a multilateral well) in which one zone has a higher pressure than another zone, the higher pressure zone may produce into the lower pressure zone rather than to the surface. Similarly, in a horizontal well that extends through a single zone,
10 perforations near the "heel" of the well, i.e., nearer the surface, may begin to produce water before those perforations near the "toe" of the well. The production of water near the heel reduces the overall production from the well. Likewise, gas coning may reduce the
15 overall production from the well.

A manner of alleviating this problem is to insert a production tubing into the well, isolate each of the perforations or laterals with packers, and control the
20 flow of fluids into or through the tubing. However, typical flow control systems provide for either on or off flow control with no provision for throttling of the flow. To fully control the reservoir and flow as needed to alleviate the above described problem, the flow is
25 throttled. A number of devices have been developed or suggested to provide this throttling although each has certain drawbacks. Note that throttling may also be desired in wells having a single perforated production zone.

30 Specifically, the prior devices are typically either wireline retrievable valves, such as those that are set within the side pocket of a mandrel, or tubing

retrievable valves that are affixed to the tubing string. The wireline retrievable valve has the advantage of retrieval and repair while providing effective flow control into the tubing without restricting the
5 production bore. However, one drawback associated with the current wireline retrievable-type valves is that the valves cannot attain "full bore flow." An important consideration in developing a flow control system pertains to the size of the restriction created into the
10 tubing. It is desirable to have full bore flow, meaning that the flow area through the valve when fully open should be at least as large as the flow area of the tubing so that the full capacity of the tubing may be used for production. Therefore, a system that provides
15 full bore flow through the valve is desired.

One area of particular concern relating to downhole valves is the erosion caused by the combination of high flow rates, differential pressure and the properties of
20 the fluids, which may contain solids, such as sand. Erosion of the tools results in premature failure of the valves.

A need remains for a flow control system that
25 provides for full bore flow and for an efficient, reliable, erosion-resistant system that can withstand the caustic environment of a wellbore, including a deviated wellbore.

SUMMARY OF THE INVENTION

Certain aspects commensurate in scope with the originally claimed invention are set forth below. It should be understood that these aspects are presented merely to provide the reader with a brief summary of certain forms the invention might take and that these aspects are not intended to limit the scope of the invention. Indeed, the invention may encompass a variety of aspects that may not be set forth below.

According to one aspect of the present invention, a valve assembly for use in a well is featured. The valve assembly comprises a valve body, a valve choke, and a sealing member. The valve body has a flow port. The valve choke has at least one orifice. The valve body and valve choke surround a hollow interior. The sealing member is located between the valve body and the valve choke. The valve assembly is operable to provide fluid flow through the flow port and at least one orifice to the hollow interior by positioning the at least one orifice on a first side of a seal formed by the sealing member. Additionally, the valve assembly is operable to prevent fluid communication between the flow port and the at least one orifice by positioning the at least one orifice on a second side of the seal.

According to another aspect of the present invention, a valve assembly for controlling the intake of wellbore fluids is featured. The valve assembly comprises a housing and a choke. The outer housing has a fluid inlet. The choke has an outer surface and a plurality of orifices through the outer surface. Each of the plurality

of orifices is separated by a solid portion of the choke outer surface. The valve assembly is operable to position the seal relative to the choke so that the seal engages the choke a solid surface portion, rather than an orifice.

According to another aspect of the present invention, a method of operating a valve assembly is featured. The method comprises deploying a valve assembly having a choke with a plurality of holes through the choke and a sealing member into a wellbore. The method also comprises operating the valve assembly to move the choke incrementally between a plurality of positions to control fluid flow into the valve assembly from the wellbore. At each of the plurality of positions the sealing member is positioned against a solid surface portion of the choke.

According to another aspect of the present invention, a system for controlling fluid flow from a wellbore is featured. The system comprises a valve assembly disposed in the wellbore and tubing to convey fluid from the wellbore to the surface. The valve assembly comprises a valve body having a flow port, a valve choke having an orifice, and a seal disposed between the valve body and the valve choke. The valve assembly also comprises a drive mechanism. The drive mechanism is operable to position the valve choke relative to the seal. Additionally, the drive mechanism is operable to position the valve choke to a first position relative to the seal so that the orifice is in complete fluid communication with the wellbore and the hollow interior.

According to another aspect of the present invention, a protective device for an orifice within a wellbore valve assembly is featured. The protective device comprises an insert having a fluid flow path therethrough. The insert is sized for insertion into the orifice. Furthermore, the insert comprises an erosion resistant material.

According to another aspect of the present invention, a deformable sealing device for use in forming a seal between a valve choke and a valve body is featured. The deformable sealing device comprises a seal ring configured to selectively form a seal between the valve choke and the valve body. The seal comprises an erosion resistant material.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will hereafter be described with reference to the accompanying drawings, wherein like reference numerals denote like elements, and:

Figure 1 is a front elevational view of a system for pumping fluids from a wellbore; according to an exemplary embodiment of the present invention;

Figure 2 is a front elevational view of a valve assembly, according to an exemplary embodiment of the present invention;

Figure 3A is a cross-sectional view of a first portion of a valve assembly, according to an exemplary embodiment of the present invention;

Figure 3B is a cross-sectional view of a second portion of a valve assembly, according to an exemplary embodiment of the present invention;

5 Figure 3C is a cross-sectional view of a third portion of a valve assembly, according to an exemplary embodiment of the present invention;

10 Figure 3D is a cross-sectional view of a fourth portion of a valve assembly, according to an exemplary embodiment of the present invention;

15 Figure 3E is a cross-sectional view of a fifth portion of a valve assembly, according to an exemplary embodiment of the present invention;

20 Figure 4 is a cross-sectional view of an orifice and orifice insert, according to an exemplary embodiment of the present invention;

Figure 5 is a cross-sectional view of a choke positioned in the fully open position, according to an exemplary embodiment of the present invention;

25 Figure 6 is a perspective view of an indexer and indexer housing, according to an exemplary embodiment of the present invention;

30 Figure 6A is an exploded view of the indexer and indexer housing of Figure 7;

Figure 6B is an end view of the indexer and indexer housing of Figure 6;

Figure 7 is a cross sectional view of a portion of a valve assembly, illustrating a choke in the closed position, according to an exemplary embodiment of the present invention;

Figure 7A is a top view of an indexer, illustrating the orientation of a j-slot and an indexer pin for a valve assembly in the closed position, according to an exemplary embodiment of the present invention;

Figure 8 is a cross sectional view of a portion of a valve assembly, illustrating a choke in an intermediate position, according to an exemplary embodiment of the present invention;

Figure 8A is a top view of an indexer, illustrating the orientation of a j-slot and an indexer pin for a valve assembly in an intermediate position, according to an exemplary embodiment of the present invention;

Figure 9 is a cross sectional view of a portion of a valve assembly, illustrating a choke in the fully-open position, according to an exemplary embodiment of the present invention;

Figure 9A is a top view of an indexer, illustrating the orientation of a j-slot and an indexer pin for a valve assembly in the fully-open position, according to an exemplary embodiment of the present invention;

Figure 10 is a front elevational view of a pumping system using two valve assemblies to withdraw fluids from

two regions of a deviated wellbore, according to an alternative embodiment of the present invention;

5 Figure 11 is a front elevational view of a pumping system using two hydraulic control lines to operate a valve assembly, according to an alternative embodiment of the present invention;

10 Figure 12 is a front elevational view of a pumping system using the differential pressure between a hydraulic control line and wellbore pressure to operate a valve assembly, according to an alternative embodiment of the present invention;

15 Figure 13 is a front elevational view of a pumping system using an electric motor to operate a valve assembly, according to an alternative embodiment of the present invention;

20 Figure 14 is a front elevational view of a pumping system using a submersible electric pump to provide hydraulic pressure to operate a valve assembly, according to an alternative embodiment of the present invention; and

25 Figure 15 is a cross-sectional view of a valve assembly using hydraulic fluid pressure and a spring to operate a valve assembly, according to an alternative embodiment of the present invention.

30 DESCRIPTION OF SPECIFIC EMBODIMENTS

One or more specific embodiments of the present invention will be described below. In an effort to

provide a concise description of these embodiments, not all features of an actual implementation may be described in the specification. It should be appreciated that in the development of any such actual implementation, as in
5 any engineering or design project, numerous implementation-specific decisions must be made to achieve the developers' specific goals, such as compliance with system-related and business-related constraints, which may vary from one implementation to another. Moreover,
10 it should be appreciated that such a development effort might be complex and time consuming, but would nevertheless be a routine undertaking of design, fabrication, and manufacture for those of ordinary skill having the benefit of this disclosure.

15 As used herein, the terms "up" and "down"; "upper" and "lower"; "upwardly" and "downwardly"; and other like terms indicating relative positions above or below a given point or element are used in this description to
20 more clearly describe some embodiments of the invention. However, when applied to equipment and methods for use in wells that are deviated or horizontal, such terms may refer to a left to right or right to left relationship as appropriate.

25 Referring generally to Figure 1, a system 20 for producing fluids from a wellbore 22 to the surface 24 is featured. In the illustrated embodiment, system 20 includes an electric submersible pumping system (ESP) 26,
30 production tubing 28, a fluid intake valve assembly 30, a hydraulic control line 32, a hydraulic controller 34, a first packer 36, and a second packer 38. However, a pumping system need not be used. Fluid pressure may be

sufficient to produce fluid to the surface without the use of a pumping system. As an additional measure, wellbore 22 is lined with casing 40.

5 In the illustrated embodiment, valve assembly 30 is disposed in a horizontal deviation 41 of wellbore 22. Valve assembly 30 is used to control the intake of fluid into system 20. Fluids, as referenced by arrows 42, flow from a geological formation 44 through perforations 46 in casing 40 into wellbore 22. First packer 36 and second packer 38 define a first region 48 within wellbore 22. Fluid 42 is drawn into system 20 from first region 48 through inlet ports 50 in valve assembly 30.

15 Valve assembly 30 is operable to control the size of the area through which fluid 42 may flow into valve assembly 30. In the illustrated embodiment, valve assembly 30 is operated by hydraulic pressure controlled from the surface 24 by a hydraulic controller 34. A control line 32 is used to apply hydraulic pressure to valve assembly 30 from hydraulic controller 34. Hydraulic controller 34 may be as simple as a pair of manually operated valves or as complex as a computer controlled system.

25 Referring generally to Figure 2, an exemplary embodiment of valve assembly 30 is featured. Valve assembly 30 includes a lower housing 60, a choke housing 62, a hydraulic chamber housing 64, an indexer housing 66, a piston housing 68, and a nitrogen coil housing 70. In the illustrated embodiment, a plurality of fluid inlet ports 50 are provided in choke housing 62 so that fluid 42 may enter the interior of choke housing 62. Lower

housing 60 may terminate valve assembly 30 or be used to fluidically couple valve assembly 30 to a second valve assembly. Valve assembly 30 also includes an upper nipple 72 and a protective sleeve retainer 74 to couple the valve assembly to production tubing 28.

When valve assembly 30 is in the closed position, there is no fluid flow path for fluid 42 to be drawn into valve assembly 30 from wellbore 22. When valve assembly 30 is in an open position, ESP 26 will draw fluid 42 through the fluid inlet ports 50 into the interior of valve assembly 30 and on to the surface 24 through production tubing 28. Additionally, in this embodiment, valve assembly 30 provides "full bore" flow in the fully open position, i.e., the flow area through the orifices is at least as large as the flow area through production tubing 28. Valve assembly 30 also may be positioned to an intermediate position where fluid flow through valve assembly 30 will be throttled to less than full bore flow.

Referring generally to Figure 3A, valve assembly 30 utilizes a choke 80 housed within lower housing 60 and choke housing 62. Alternatively, choke housing 62 and inlet ports 50 could be disposed within choke 80. Lower housing 60 and choke housing 62 are generally tubular in shape and combine to form a valve bore 82. Valve bore 82 extends through valve assembly 30 from lower housing 60 to upper nipple 72. Choke 80 is slidably disposed within valve bore 82. Choke 80 has a choke bore 84 extending through the center. Choke 80 is configured with a plurality of orifices 86 to allow fluid to flow from the exterior of choke 80 into choke bore 84. When valve

assembly 30 is in an open position, fluid is drawn through orifices 86 into choke bore 84, then to valve bore 82, and on to production tubing 28. When valve assembly 30 is in a closed position, no fluid is drawn into choke bore 84.

In the illustrated embodiment, fluid flow into choke bore 84 is controlled by positioning choke 80 within choke housing 62 so that fluid may either flow, or not flow, through some or all of the orifices 86. Alternatively, choke 80 may be disposed exterior to choke housing 62. Additionally, although the valve is shown with the holes in the choke 80 and the seal attached to the housing, other embodiments also are within the scope of the present invention. For example, the plurality of inlet orifices may be provided in the housing with a sleeve moveable to selectively uncover the inlet orifices. In such an embodiment, the seal is preferably attached to the sleeve to provide the necessary sealing between the orifices.

In the illustrated embodiment, each of the plurality of orifices 86 is generally circular. Additionally, in this embodiment each orifice 86, generally, has the same flow area. However, the size of orifices 86 may be varied. As best illustrated in Figure 4, each of the plurality of orifices may have an insert 88 to line the orifice and prevent flow damage to the orifice and choke 80. Orifice insert 88 may be a separable device or a layer of material deposited on the orifice surface. Each insert 88 has a passageway 89 through the insert. Preferably, each orifice insert 88 is constructed from a hard, erosion-resistant material having a hardness of at

least 1,200 knoops. Acceptable materials for the orifice insert 88 include polycrystalline diamond, vapor deposition diamond, ceramic, hardened steel, tungsten-carbide, and carbide. Alternatively, instead of using orifice inserts 88, choke 80 may be constructed of a hard, erosion-resistant material.

Referring again to Figure 3A, fluid 42 is prevented by sliding seal 90 from flowing through orifices 86 into choke bore 84. Sliding seal 90 forms a seal between the inside surface 92 of choke housing 62 and the outside surface 94 of choke 80. Sliding seal 90 includes a primary seat 96 and a secondary seat 98. In the exemplary embodiment, primary seat 96 is formed of a hard, erosion-resistant material. Preferably, such material has a hardness of at least 1,200 knoops. Acceptable materials for primary seat 96 include polycrystalline diamond, vapor deposition diamond, ceramic, hardened steel, tungsten-carbide, and carbide. The secondary seat 98 may be formed from any of a number of deformable, erosion-resistant, plastic-like materials such as PEEK. Sliding seal 90 also includes a flow restrictor ring 100, a seat retainer 102, and a seat seal assembly 104.

Choke 80 includes a choke stop 106. Choke stop 106 is preferably an annular protrusion that extends radially outwardly from choke 80 into an annular gap 108 between choke 80 and choke housing 62. In the closed position of choke 80, choke 80 abuts primary seat 96. The sealing engagement between the primary seat 96 and choke stop 106 helps to seal against high pressure differential non-compressible fluid flow. The secondary seat 98 aids in

the sealing engagement between choke stop 106 and primary seat 96. The sealing engagement between the plastic-like secondary seat 98 and choke stop 106 helps to seal against low pressure differential gas flow.

5

In the illustrated embodiment, valve assembly 30 allows fluid communication between the inlet ports 50 and those orifices 86 above sliding seal 90 and prohibits fluid communication between the fluid inlet ports 50 and those orifices 86 below sliding seal 90. In the illustrated embodiment, the number of orifices 86 above sliding seal 90 is established by hydraulically positioning choke 80 within choke housing 62.

10

15

In the illustrated embodiment, choke 80 may be positioned at a fully closed position, a fully open position, or among several intermediate positions. As best illustrated in Figure 5, in the fully open position of choke 80 fluid flows through all of the orifices. In the intermediate flow positions, fluid flows through at least one orifice 86. The position selected is determined by the desired flow characteristics of valve assembly 30. The number, size, and configuration of orifices 86 may be selected to produce a variety of different flow characteristics. The choke 80 and the orifices 86 are configured so that fluid flows through a different configuration of orifices 86 at each new intermediate position. By varying the configuration of orifices 86 at each intermediate position, the fluid flow area through the orifices may be varied and fluid flow may be throttled.

20

25

30

In the illustrated embodiment, a greater number of orifices 86 are placed in service at each new intermediate position from fully closed to fully open. However, the sequence may be varied to provide a larger flow area or a smaller flow area, or combinations of both. Additionally, choke 80 has several large diameter free flow orifices 110 that are placed in service to provide "full bore" flow when valve assembly 30 is in the fully open position. In "full bore" flow, the flow area of the plurality of orifices 86 and free flow orifices 110 is at least as large as the flow area through production tubing 28.

The orifices 86 are configured on choke 80 so that sliding seal 90 is not disposed over any of the orifices 86 when valve assembly 30 is at one of the intermediate positions or the fully open position. This might produce erosion damage to sliding seal 90. As an additional preventive measure, the orifices are configured so that each orifice is disposed at a sufficient distance from sliding seal 90 to either prevent or minimize erosion damage to sliding seal 90.

Referring generally to Figure 3B, a lower seal 112 prevents fluid flow up annular gap 108. Lower seal 112 forms a sliding seal between the inside surface 114 of hydraulic chamber housing 64 and the outside surface 94 of choke 80. Lower seal 112 utilizes a lower seal assembly 115, lower seal washer 116, a lower spiral retainer ring 118, a lower seal retainer ring 120, a lower seal scraper 122, and an O-ring 124.

Referring generally to Figure 3C, a floating joint 130 is used to couple choke 80 to a piston 132. Piston 132 has a hollow interior that extends choke bore 84. Piston 132 is housed within, and secured to, an indexer 134. Indexer 134 is used to guide the movement of piston 132. Indexer 134 is, in turn, housed within indexer housing 66. A second annular gap 135 is formed between indexer 134 and indexer housing 66. The floating joint 130 utilizes a floating joint seal assembly 136, a floated joint spacer 138, a floated joint body piece 140, a floated joint split ring 142, a floated joint retainer 144, a first socket set screw 146, and a second socket set screw 148. A lower bearing 150 is provided between piston 132 and indexer 134 so that indexer 134 may rotate around piston 132. Indexer 134 is configured for rotation about a central axis 152 as piston 132 is moved linearly. Indexer 134 is coupled to floating joint 130 by an indexer retainer 154 and a thrust washer 156.

Lower seal 112 defines the lower end of second annular gap 135 and a piston seal 160 defines the upper end. Piston seal 160 is secured to piston 132 and forms a sliding seal between the inside surface 162 of piston housing 68 and the outside surface 164 of piston 132. Piston seal 160 utilizes a piston seal assembly 165, a piston seal washer 166, a piston seal retainer ring 168, and an upper spiral retainer ring 170. An upper bearing 172 is provided to cooperate with lower bearing 150 to allow rotation of indexer 134. A thrust washer 174 is disposed between upper bearing 172 and piston seal retainer ring 168.

Hydraulic fluid 175 occupies second annular gap 135. In this view, applying hydraulic pressure to hydraulic fluid 175 in annular gap 135 drives piston 132 to the left. An opposing force, such as a pressurized gas or spring, is used to drive piston 132 to the right. Indexer 134 controls the movement of indexer 134, and thus piston 132. In the preferred embodiment, indexer 134 enables choke 80 to be selectively positioned at various intermediate positions between the closed position and the fully open position, enabling valve assembly 30 to provide intermediate flow rates between fluid inlet ports 50 and choke bore 84.

As best illustrated in Figures 6 and 6A, indexer 134 includes a j-slot 176 that extends around the indexer. A stationary indexer pin 178 is inserted into j-slot 176. As piston 132 is driven up or down, its movement will be guided by indexer pin 178 acting on j-slot 176 of indexer 134.

J-slot 176 and indexer pin 174 cause indexer 134 to rotate about axis 152 as the valve assembly is shifted from one position to the next. Indexer 134 makes one complete revolution as valve assembly 30 transits from the closed position to the fully open position and back to the closed position. A portion of the outer surface 180 of indexer 134 is configured with a toothed surface 182. A latch 184, secured to indexer housing 66, is used with toothed surface 182 to ensure that indexer 134 rotates about axis 152 in only one direction. This ensures that j-slot 176 cooperates with indexer pin 178 to produce the desired motion of indexer 134.

As best illustrated in Figure 6B, latch 184 has a tooth 186 and toothed surface 182 has a plurality of abutting surfaces 188. In this view, indexer 134 may only rotate clockwise. If indexer 134 is rotated
5 counter-clockwise, catch 186 will contact one of the abutting surfaces 188 of toothed surface 182, preventing further motion of indexer 134 in the counter-clockwise direction. Indexer pin 178 is inserted through a first opening 190 in indexer housing 66 and latch 184 is
10 inserted through a second opening 192 in indexer housing 66. As illustrated in Figure 3C, a pair of keeper plates 193 are placed over first opening 190 and a second opening 192 in indexer housing 66.

Referring generally to Figure 3D, pressurized nitrogen is used to provide the opposing force against the hydraulic pressure. Pressurized nitrogen 200 is stored in a pocket formed in piston housing 68. Another pressurized gas, such as air, also may be used. The
20 pocket is defined by a third annular gap 202 formed between piston seal 160, an upper seal 204, and a supply line 206 extending from a check valve 208 to annular gap 202. Upper seal 204 includes an upper seal assembly 210, an upper seal washer 212, an upper spiral retainer ring
25 214, an upper seal retainer ring 216, an upper seal scraper 218, and an O-ring 220.

A nitrogen coil 222 is used to supply pressurized nitrogen. Nitrogen coil 222 is housed within the nitrogen
30 coil housing 70. Nitrogen coil 222 is wrapped around a mandrel 224 secured to piston housing 68 at one end and upper nipple 72 at the other end. A nitrogen port fitting 226 is provided to couple nitrogen from nitrogen

coil 222 to nitrogen supply line 206. As illustrated in Figure 3E, nitrogen coil housing 70 is coupled to production tubing 28 by upper nipple 72 and protective sleeve retainer 74.

5

Hydraulic pressure is applied from the surface between piston seal 160 and lower seal 112 to operate valve assembly 30. Nitrogen pressure supplied by nitrogen coil 222 is provided between piston seal 160 and upper seal 204. The nitrogen pressure on one side of piston seal 160 opposes the hydraulic pressure on the other side of piston seal 160. The system is configured so that when hydraulic pressure is applied from the surface it overcomes the nitrogen pressure and drives piston 132 to the left. When hydraulic pressure is vented, the nitrogen pressure drives piston 132 to the right.

Referring generally to Figures 7-9, indexer 134, j-slot 176, and indexer pin 178 combine to establish incremental linear movement of piston 132, and choke 80. In the illustrated embodiment, valve assembly 30 has ten different incremental linear positions: a closed position, eight intermediate positions, and a fully open position. The number of positions, however, is arbitrary. To move from one position to the next, hydraulic pressure is first applied to drive piston 132 to the left. Hydraulic pressure is then vented, allowing the opposing force to drive piston 132 to the right. The overall displacement of piston 132, left or right, is established by j-slot 176.

Figure 7 illustrates valve assembly 30 in the closed position. Fluid 42 is prevented from flowing into choke bore 84 through any of the orifices 86 by sliding seal 90. As illustrated in Figure 7A, with hydraulic fluid vented to atmosphere, nitrogen pressure forces piston 132 to the right positioning indexer 134 against indexer pin 178 in a first slot position 240 in j-slot 176.

To move to the next incremental linear position, hydraulic pressure is applied to drive piston 132 and indexer 134 to the left. J-slot 176 and indexer pin 178 cooperate to direct the movement of indexer 134. Hydraulic pressure drives piston 132 such that indexer 134 is positioned against indexer pin 178 at a second slot position 242 in j-slot 176, stopping further linear movement of piston 132. As piston 132 is driven linearly, indexer 134 is rotated about axis 152 by j-slot 176.

Hydraulic pressure is then vented to atmosphere to complete the movement to the next position. The nitrogen pressure forces piston 132 and indexer 134 to the right. J-slot 176 and indexer pin 178 cooperate to direct the movement of indexer 134, such that indexer 134 is positioned against indexer pin 178 at a third position 244 in j-slot 176. Third position 244 is the first intermediate position of valve assembly 30. In this position, a first set of orifices 246 is positioned beyond sliding seal 90 and fluid 42 flows through the first set of orifices 246 into choke bore 84.

The axial distance between first position 240 and third position 244 of j-slot 176 represents the linear

displacement of choke 80 from the closed position to the first intermediate position. In the illustrated embodiment, j-slot 176 is configured so that the axial displacement is constant from one position to the next. Furthermore, choke 80 is configured so that the axial displacement is the same distance as the distance 250 between each set of orifices 86. Thus, one additional orifice, or set of orifices, may provide flow at each new intermediate position.

Figures 8 and 8A represent valve assembly 30 at the fifth intermediate position. Five sets of orifices, shown in solid black, provide flow paths through choke 80 into choke bore 84. Each set of orifices is configured so that at each position of valve assembly 30, the set of orifices closest to sliding seal 90 is at a sufficient distance from sliding seal 90 to prevent, or minimize, flow damage to sliding seal 90.

Figure 8A illustrates the linear motion of indexer 134 in relation to indexer pin 178. Indexer 134 is displaced to the left, as referenced by arrow 251, from the closed position of Figure 8A, shown in dashed lines.

Figures 9 and 9A represent valve assembly 30 in the fully-open position. All orifices 86, including free flow orifices 110, are illustrated providing fluid flow paths into choke bore 84. To return valve assembly 30 to the closed position, valve assembly 30 is operated in the same manner as if positioning valve assembly 30 to a more open position, hydraulic pressure is applied and then vented. During venting, nitrogen pressure drives piston

132 and indexer 134 back to the closed position, as shown in dashed lines, through a long slot portion 252.

Referring generally to Figure 10, multiple valve assemblies may be utilized to draw fluids from two different regions of a wellbore through a common production tubing line. Different regions of wellbores may have different flow characteristics, such as fluid pressure. In the illustrated embodiment, the choke bores of two valve assemblies are coupled together fluidically in series. Each valve assembly is independently controlled to allow each valve assembly to be configured for the flow characteristics of the corresponding region of the wellbore. Thus, one valve assembly in a lower fluid pressure region may be fully open while the second valve assembly in a higher pressure region may be throttled. Thus, allowing production from both regions through a single system of production tubing.

In the illustrated embodiment, a first valve assembly 260 is disposed in a first region 262 of a wellbore 22, defined by a first packer 264 and a second packer 266. First valve assembly 260 is coupled by tubing 268 to a second valve assembly 270. Second valve assembly 270 is disposed in a second region 272 of a wellbore 22, defined by a third packer 274 and a fourth packer 276. Second valve assembly 270 is, in turn, coupled to the surface. First valve assembly 260 is operated by a first control line 280 and second valve assembly 270 is operated by a second control line 282. First valve assembly 260 and second valve assembly 270 may be operated independently to provide the desired flow

characteristics from the first and second regions of wellbore 22.

Referring generally to Figure 11, in an alternative embodiment, two control lines from the surface, rather than a single control line and nitrogen pressure, may be used to operate a valve assembly. In the illustrated embodiment, valve assembly 290 uses a first control line 292 and a second control line 294 to drive piston 132. Differential pressures between the two control lines is used to drive piston 132 in both directions, rather than using an opposing force, such as a pressurized gas or spring.

Referring generally to Figure 12, in a similar manner, the differential pressure between hydraulic pressure applied from the surface and the wellbore pressure may be used to drive the piston. In the illustrated embodiment, wellbore pressure is applied to the interior of valve assembly 30 via a diaphragm 296.

Referring generally to Figure 13, rather than hydraulic pressure, a submersible electric motor 300 may be used to position a choke in relation to an outer housing, or vice versa. In the illustrated embodiment, a valve assembly 298 is drivingly coupled to submersible electric motor 300 to position choke 80. The submersible electric motor 300 is supplied with electrical power by a power cable 302 extending from an electrical controller 304 at the surface.

Referring generally to Figure 14, alternatively, a submersible electric motor 306 may be used to drive a

submersible pump 308. The submersible pump 308 may be used to supply the hydraulic pressure to operate valve assembly 30.

5 Referring generally to Figure 15, an alternative valve assembly 312 may use a spring 314, rather than pressurized gas to oppose hydraulic pressure.

10 It will be understood that the foregoing description is of a preferred embodiment of this invention, and that the invention is not limited to the specific forms shown. For example, a variety of different configurations of orifices may be can be used to provide desired flow characteristics. Furthermore, a variety of different j-
15 slot configurations may be used to direct movement of a choke. Additionally, the valve assemblies may be used in pumping systems other than electric submersible pumping systems. Also, the valve assemblies may be disposed in wellbores other than deviated wellbores. These and other
20 modifications may be made in the design and arrangement of the elements without departing from the scope of the invention as expressed in the appended claims.

CLAIMS

What is claimed is:

- 5 1. A valve assembly for use in a well, comprising:
- a valve member defining a plurality of fluid
 inlet orifices; and
- 10 a sleeve axially moveable to selectively permit
 and prevent flow of fluid through selected
 fluid inlet orifices of the plurality of
 fluid inlet orifices.
- 15 2. The valve assembly as recited in claim 1,
 further comprising:
- a sealing member disposed between the valve
20 member and the sleeve, wherein the
 plurality of fluid inlet orifices are
 spaced axially along the valve member, the
 sleeve being selectively moveable to a
 plurality of defined positions, further
25 wherein at each of the plurality of
 defined positions the sealing member is
 positioned at a location between adjacent
 fluid inlet orifices.
- 30 3. The valve assembly as recited in claim 1,
 wherein the sealing member comprises a deformable seal
 between a valve seat and the valve member.

4. The valve assembly as recited in claim 3,
wherein the deformable seal comprises PEEK.

5

5. The valve assembly as recited in claim 1,
wherein the sealing member comprises a sliding seal
between the valve member and the sleeve.

10

6. The valve assembly as recited in claim 1,
wherein the sliding seal comprises PEEK.

15

7. The valve assembly as recited in claim 1,
wherein the sealing member comprises a valve seat, the
valve seat comprising a material from a group consisting
of polycrystalline diamond, vapor deposition diamond,
ceramic, hardened steel, tungsten carbide and carbide.

20

8. The valve assembly as recited in claim 1,
further comprising:

25

a valve seat comprising a material having a
hardness of at least 1,200 knoops.

30

9. The valve assembly as recited in claim 1,
further comprising:

an orifice insert positioned in the at least one fluid inlet orifice, the orifice insert having a passageway therethrough.

5

10. The valve assembly as recited in claim 9, wherein the orifice insert comprises a material from a group consisting of polycrystalline diamond, vapor deposition diamond, ceramic, hardened steel, tungsten carbide and carbide.

10

11. The valve assembly as recited in claim 9, wherein the orifice insert comprises a material having a hardness of at least 1,200 knoops.

15

12. The valve assembly as recited in claim 1, wherein the sleeve comprises a material from the group consisting of polycrystalline diamond, vapor deposition diamond, ceramic, hardened steel, tungsten carbide, and carbide.

20

13. The valve assembly as recited in claim 1, wherein at least a portion of the sleeve is coated with a material comprising a material from the group consisting of polycrystalline diamond, vapor deposition diamond, ceramic, hardened steel, tungsten carbide, and carbide.

25

30

14. A valve assembly for use in a well, comprising:

an outer housing;

an inner housing disposed within the outer
housing, the inner housing having a hollow
interior, and one of the outer housing and
the inner housing having a plurality of
radial flow passages; and

a sealing device disposed between the inner
housing and the outer housing,

wherein the outer housing and the inner housing
may be axially moved relative to each other
to expose selected configurations of the
radial flow passages to control fluid flow
therethrough without directly exposing the
sealing device to the fluid flow.

15. The valve assembly as recited in claim 14,
wherein the outer housing is moveable relative to the
inner housing.

16. The valve assembly as recited in claim 14,
wherein the inner housing is moveable relative to the
outer housing.

17. The valve assembly as recited in claim 14,
wherein the sealing device comprises a sliding seal.

18. The valve assembly as recited in claim 17,
wherein the sliding seal comprises a valve seat, the
valve seat comprising a material from a group consisting
of polycrystalline diamond, vapor deposition diamond,
5 ceramic, hardened steel, tungsten carbide and carbide.

19. The valve assembly as recited in claim 18,
further comprising a deformable seal disposed between the
10 inner housing and the outer housing.

20. The valve assembly as recited in claim 19,
wherein the deformable seal comprises PEEK.

21. The valve assembly as recited in claim 17,
further comprising a valve seat having a hardness of at
least 1,200 knoops.

22. The valve assembly as recited in claim 14,
further comprising:

25 an orifice insert disposed within at least one
opening through which fluid flows, the
orifice insert having a passageway
therethrough.

23. The valve assembly as recited in claim 22,
wherein the orifice insert comprises a layer of material
disposed within at least one opening.

24. The valve assembly as recited in claim 22,
wherein the orifice insert comprises a material from a
5 group consisting of polycrystalline diamond, vapor
deposition diamond, ceramic, hardened steel, tungsten
carbide and carbide.

25. The valve assembly as recited in claim 22,
10 wherein the orifice insert comprises a material having a
hardness of at least 1,200 knoops.

26. The valve assembly as recited in claim 22,
15 wherein the orifice insert comprises tungsten carbide.

27. The valve assembly as recited in claim 22,
20 wherein the orifice insert comprises diamond.

28. The valve assembly as recited in claim 14,
wherein the inner housing comprises a material from the
group consisting of polycrystalline diamond, vapor
25 deposition diamond, ceramic, hardened steel, tungsten
carbide, and carbide.

29. The valve assembly as recited in claim 14,
30 wherein the outer housing comprises a material from the
group consisting of polycrystalline diamond, vapor
deposition diamond, ceramic, hardened steel, tungsten
carbide, and carbide.

30. A method of operating a valve assembly,
comprising:

5 forming a valve assembly having an outer housing
 and an inner housing, a sealing device
 therebetween, and a plurality of flow
 passages in at least one of the inner
 housing and the outer housing;
10 deploying the valve assembly into a well; and

 operating the valve assembly to selectively
 establish the relative position of the
 inner housing and the outer housing to
15 expose a desired number of flow passages
 to fluid flow therethrough.

31. The method as recited in claim 30, wherein
20 forming comprises configuring a flow passage with a
 generally circular shape.

32. The method as recited in claim 31, wherein
25 forming comprises configuring a flow passage with a
 protective insert

33. The method as recited in claim 32, wherein
 forming comprises configuring a protective insert with a
30 material having a hardness of at least 1,200 knoops.

34. The method as recited in claim 32, wherein forming comprises configuring a protective insert with tungsten carbide.

35. The method as recited in claim 32, wherein forming comprises configuring one of the inner housing and outer housing with a material having a hardness of at least 1,200 knoops.

36. The method as recited in claim 30, wherein operating the valve assembly comprises engaging a deformable seal with a choke stop when the valve assembly is in a closed position.

37. The method as recited in claim 36, wherein forming comprises configuring the deformable seal with PEEK.

38. A system for controlling fluid flow from a wellbore, comprising:

a valve assembly having:

a valve member defining a plurality of fluid inlet orifices;

a sleeve moveable to permit and prevent flow of fluid through selected ones of the plurality of fluid inlet orifices;

a drive mechanism operable to position the sleeve relative to the valve; and

5 tubing fluidicly coupled to the valve assembly for conveying fluid to a surface location.

10 39. The system as recited in claim 38, comprising a protective insert disposed within a fluid inlet orifice.

15 40. The system as recited in claim 38, further comprising a sealing member disposed between the valve member and the sleeve, wherein the plurality of fluid inlet orifices are spaced axially along the valve member, the sleeve being selectively moveable to a plurality of defined positions, further wherein at each of the plurality of defined positions the sealing member forms a
20 seal at a location between adjacent fluid inlet orifices.

25 41. The system as recited in claim 38, wherein the valve assembly is configured to form a seal generally at a midpoint between adjacent fluid inlet orifices.

30 42. The system as recited in claim 41, wherein the adjacent fluid inlet orifices are spaced axially to minimize flow damage to the seal.

43. The system as recited in claim 38, wherein the drive mechanism is controlled by hydraulic pressure.

5 44. The system as recited in claim 38, wherein each fluid inlet orifice is generally circular.

10 45. The system as recited in claim 39, wherein a protective insert is configured with a material having a hardness of at least 1,200 knoops.

15 46. The system as recited in claim 39, wherein a protective insert comprises tungsten carbide.

20 47. The system as recited in claim 39, wherein a fluid inlet orifice is configured with a layer of material having a hardness of 1,200 knoops.

25 48. The system as recited in claim 39, wherein a fluid inlet orifice is configured with a layer of tungsten carbide.

30 49. A valve assembly for controlling fluid flow, comprising:

 a housing having at least one inlet orifice;
 and

a protective insert disposed in the at least
one inlet orifice to protect the at least
one inlet orifice from erosion.

5

50. The valve assembly as recited in claim 49,
wherein the protective insert comprises an erosion-
resistant material.

10

51. The valve assembly as recited in claim 49,
wherein the protective insert comprises a layer of
erosion-resistant material.

15

52. The device as recited in claim 49, wherein the
erosion resistant material comprises tungsten carbide.

20

53. The device as recited in claim 49, wherein the
erosion resistant material comprises a material
having a hardness of 1,200 knoops.

1/19

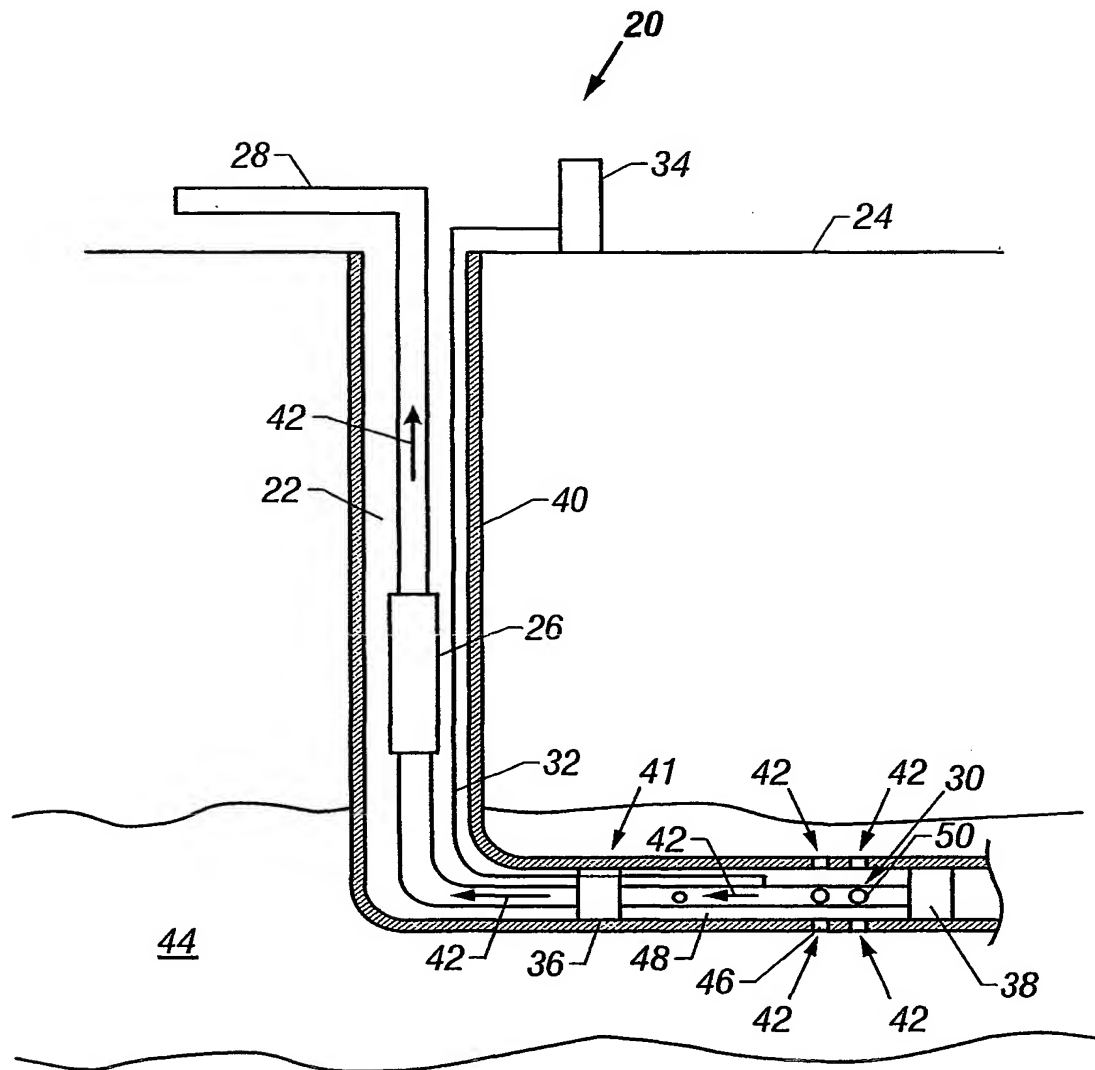


FIG. 1

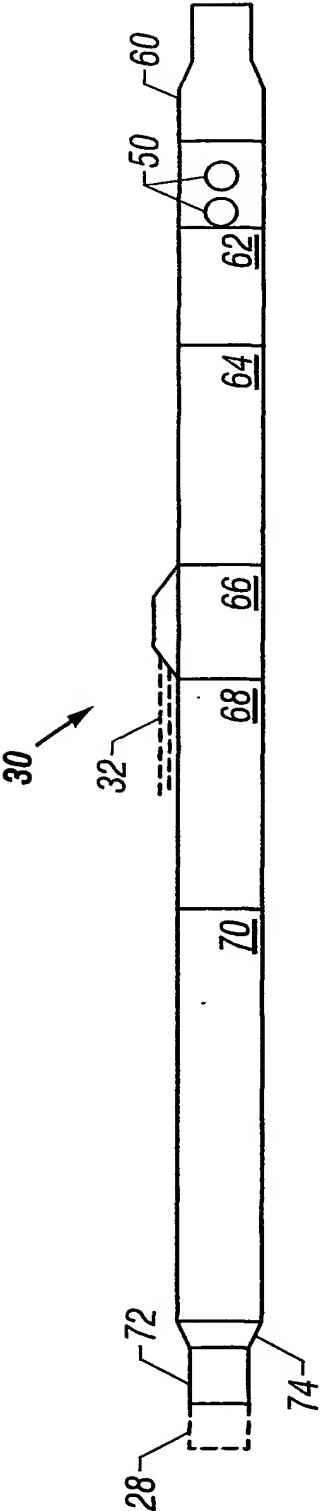


FIG. 2

3/19

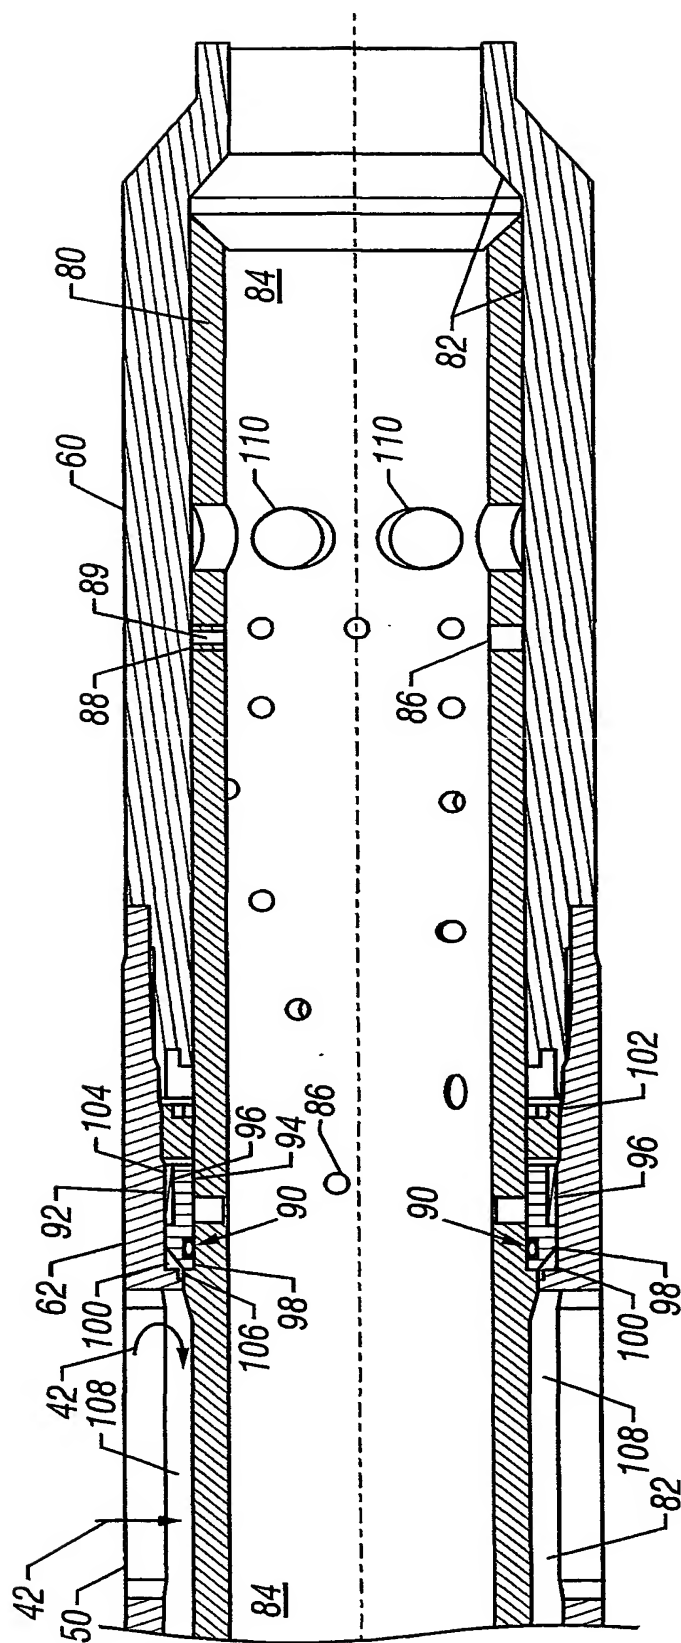


FIG. 3A

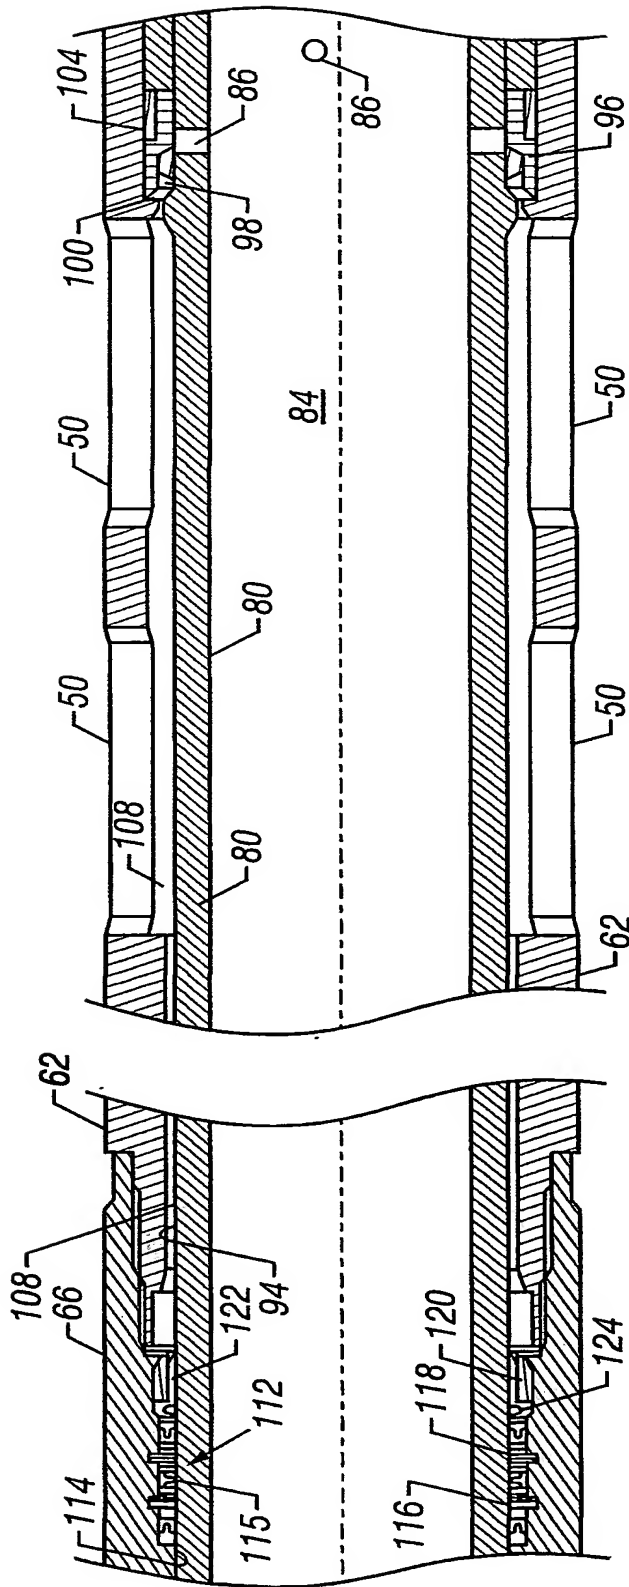


FIG. 3B

6/19

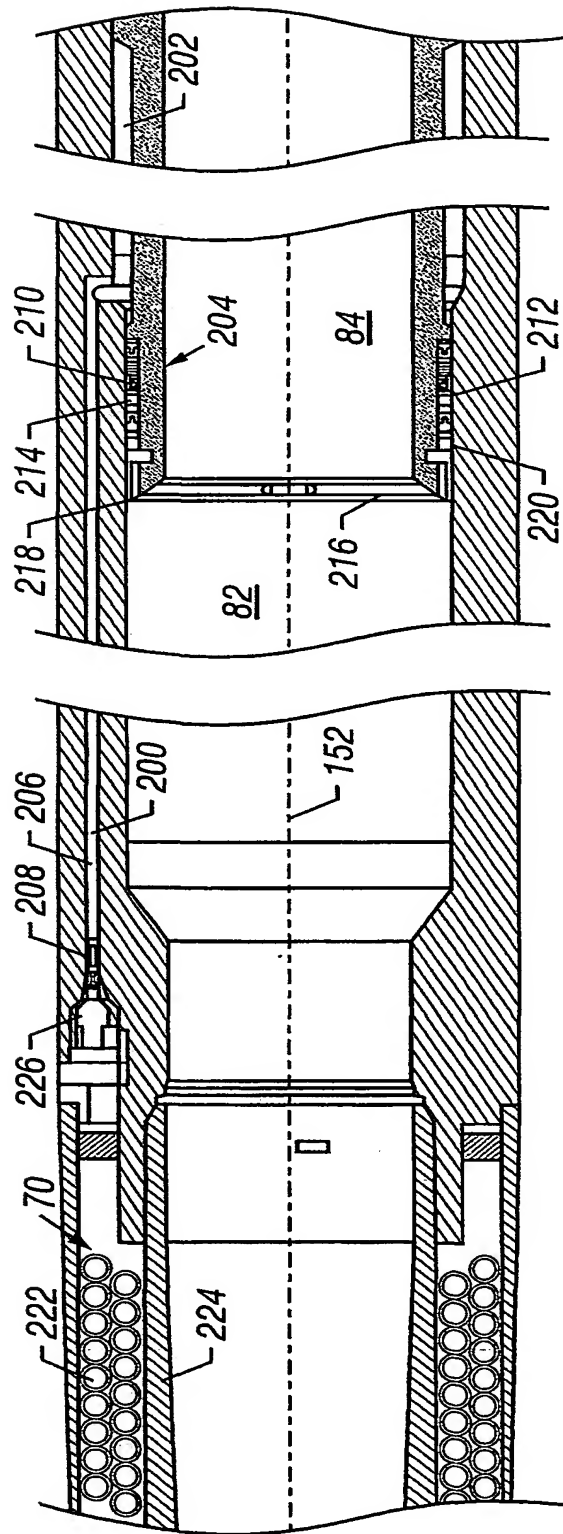


FIG. 3D

SUBSTITUTE SHEET (RULE 26)

7/19

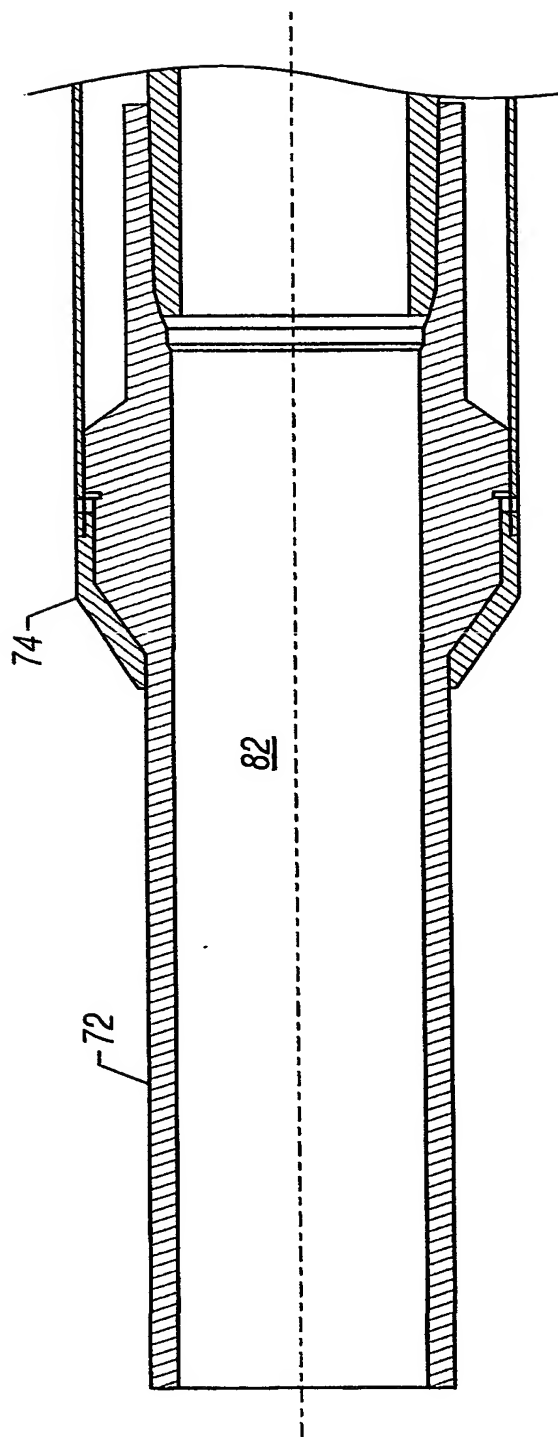


FIG. 3E

8/19

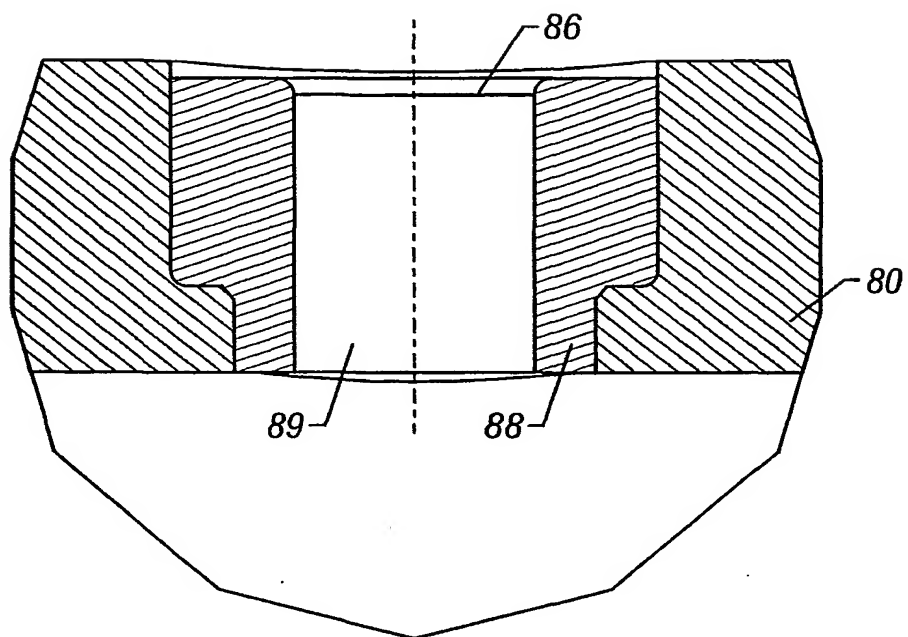


FIG. 4

9/19


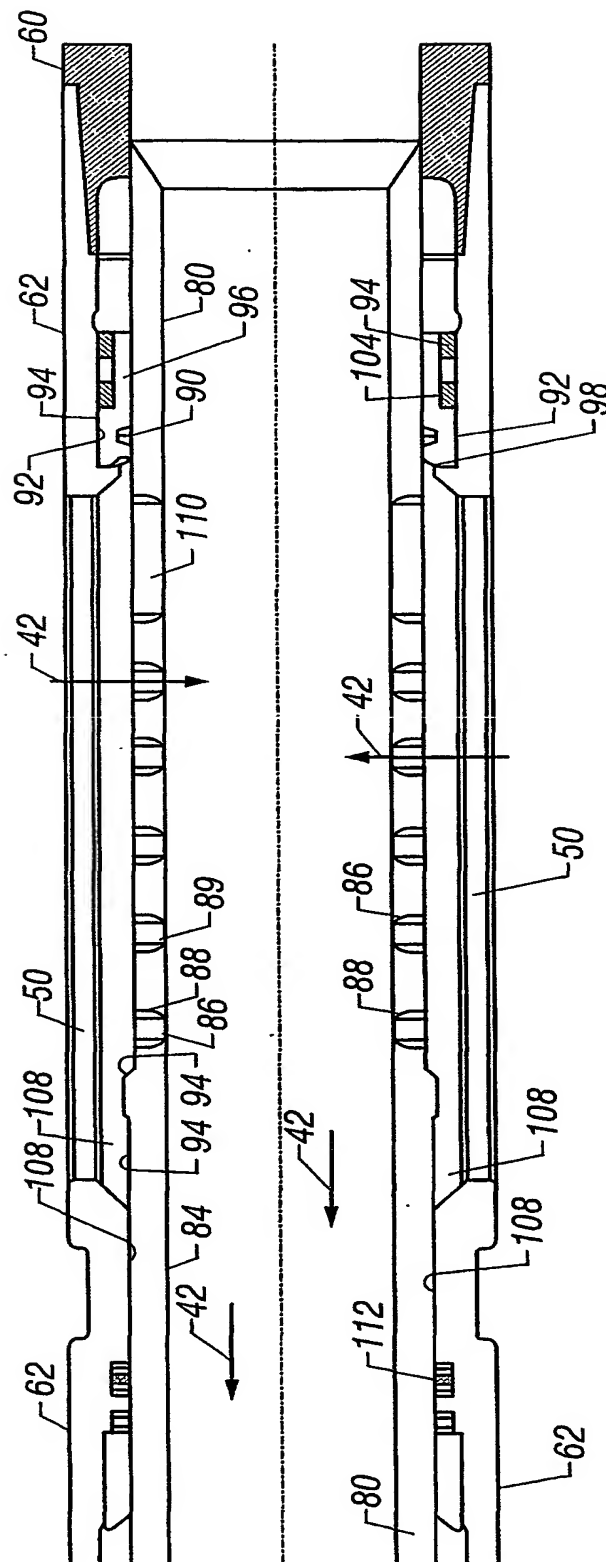


FIG. 5

10/19

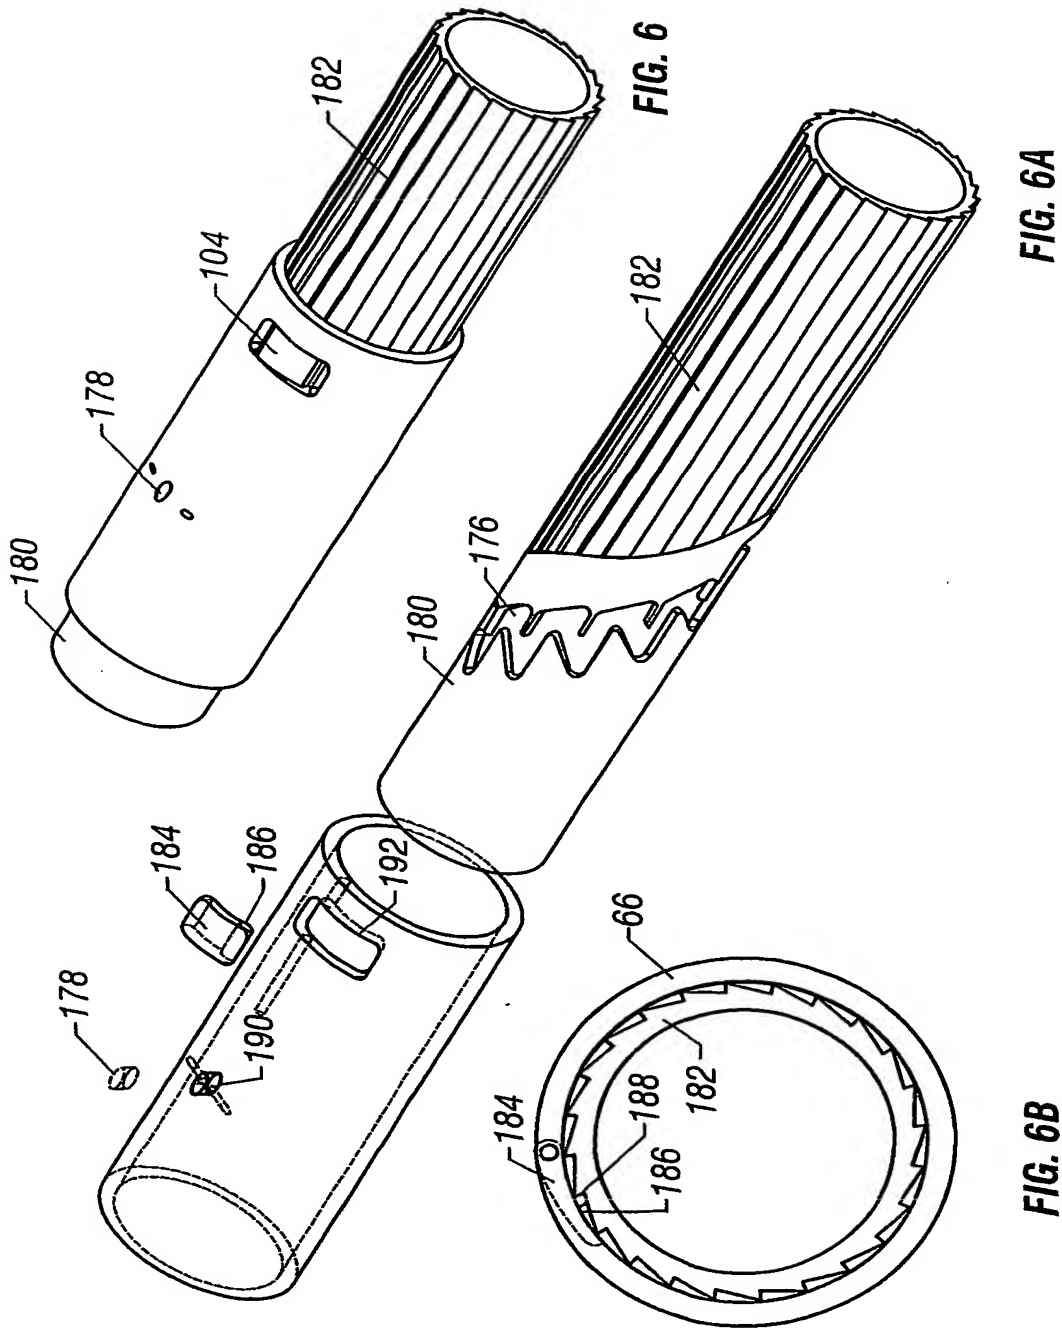

11/19

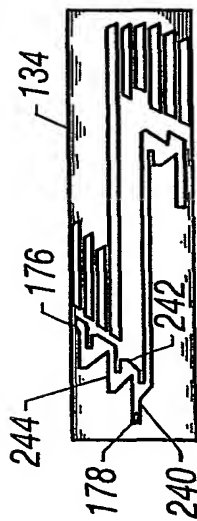


FIG. 7A

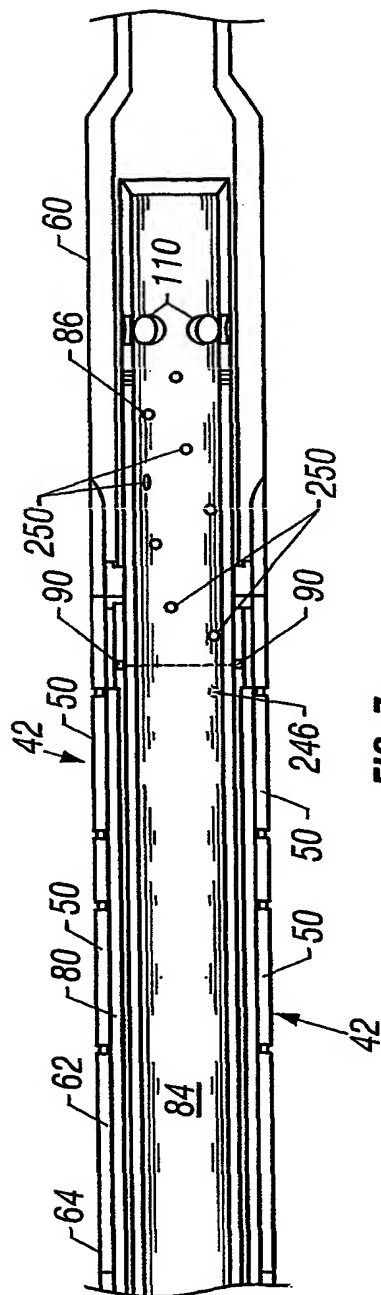


FIG. 7

12/19



FIG. 8A

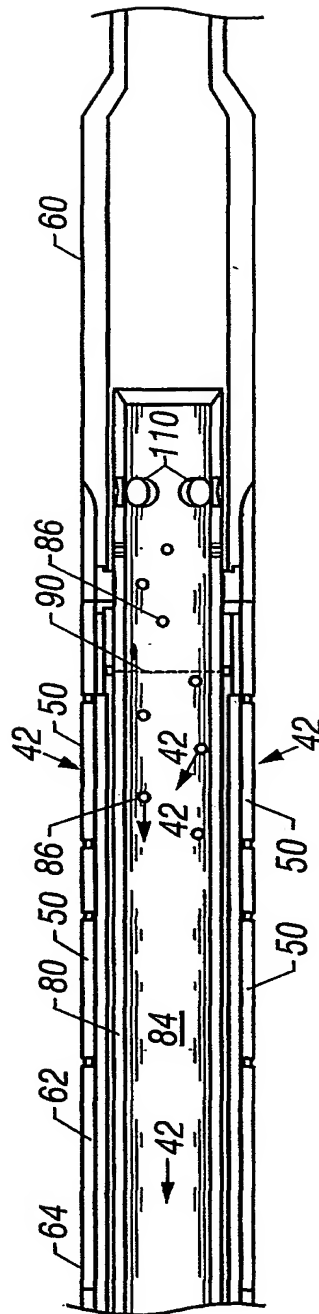


FIG. 8

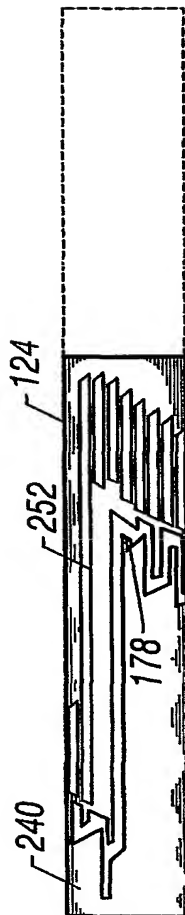


FIG. 9A

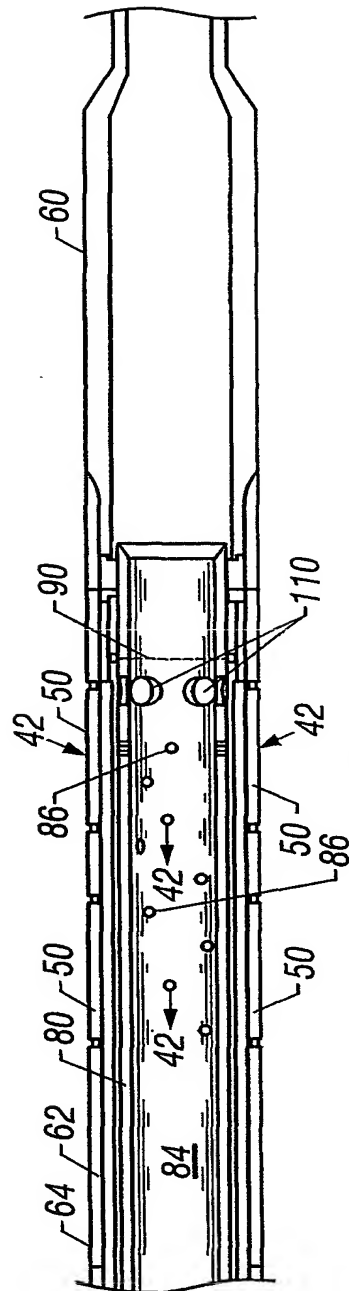


FIG. 9

15/19

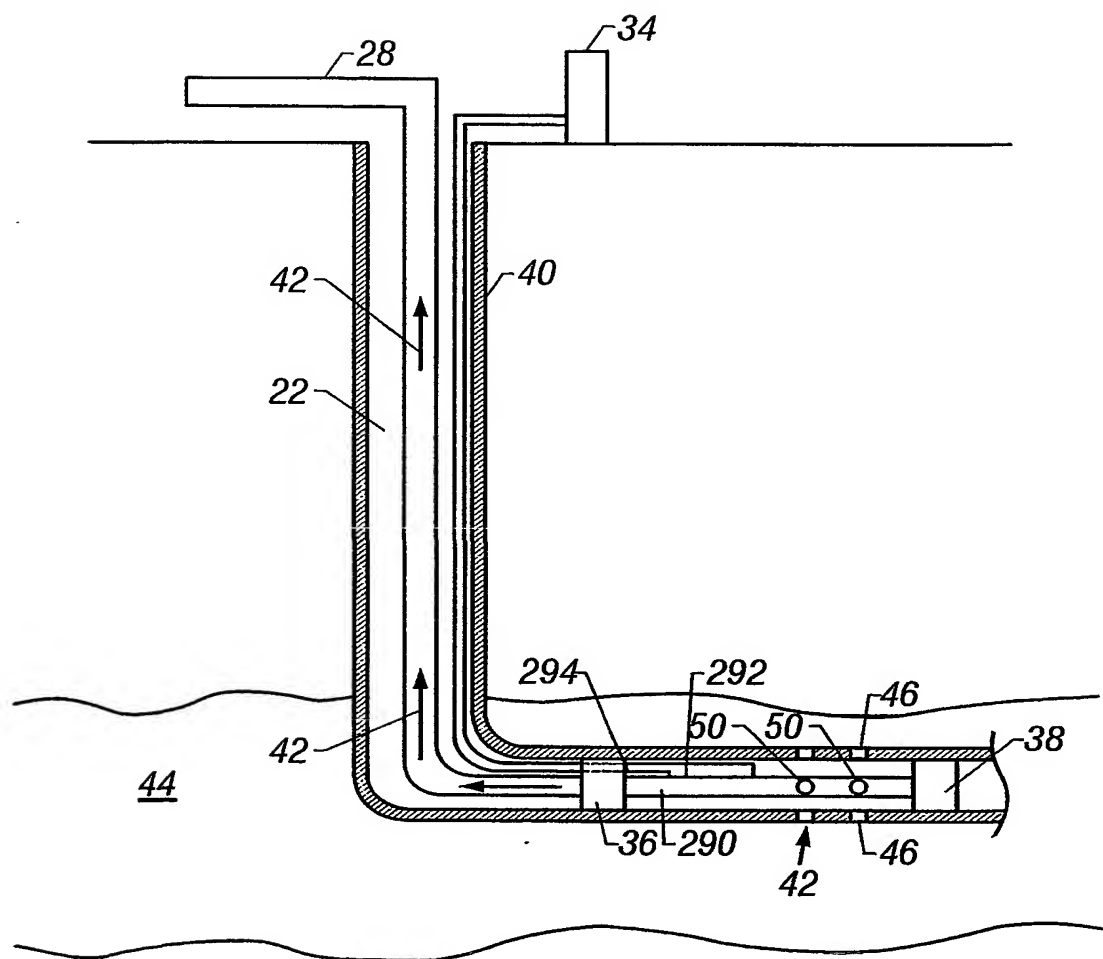


FIG. 11

17/19



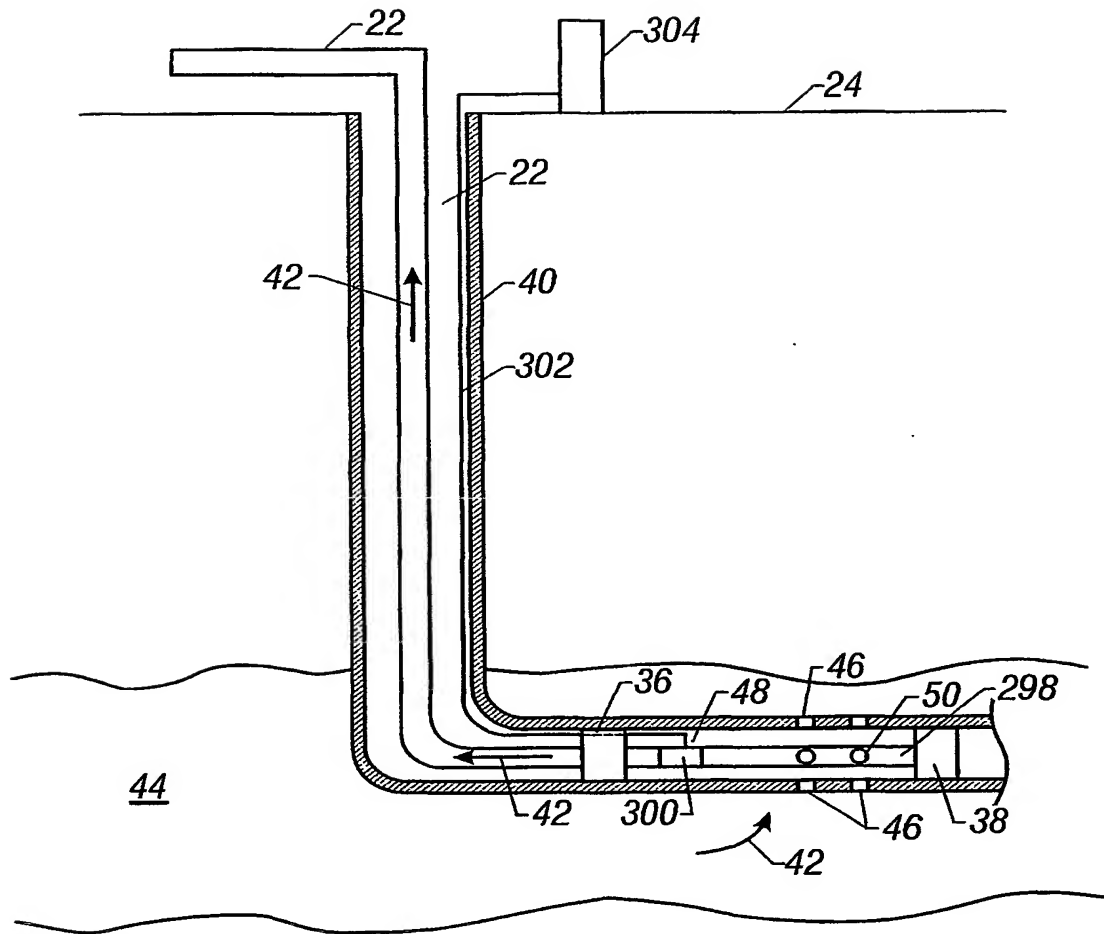


FIG. 13

18/19

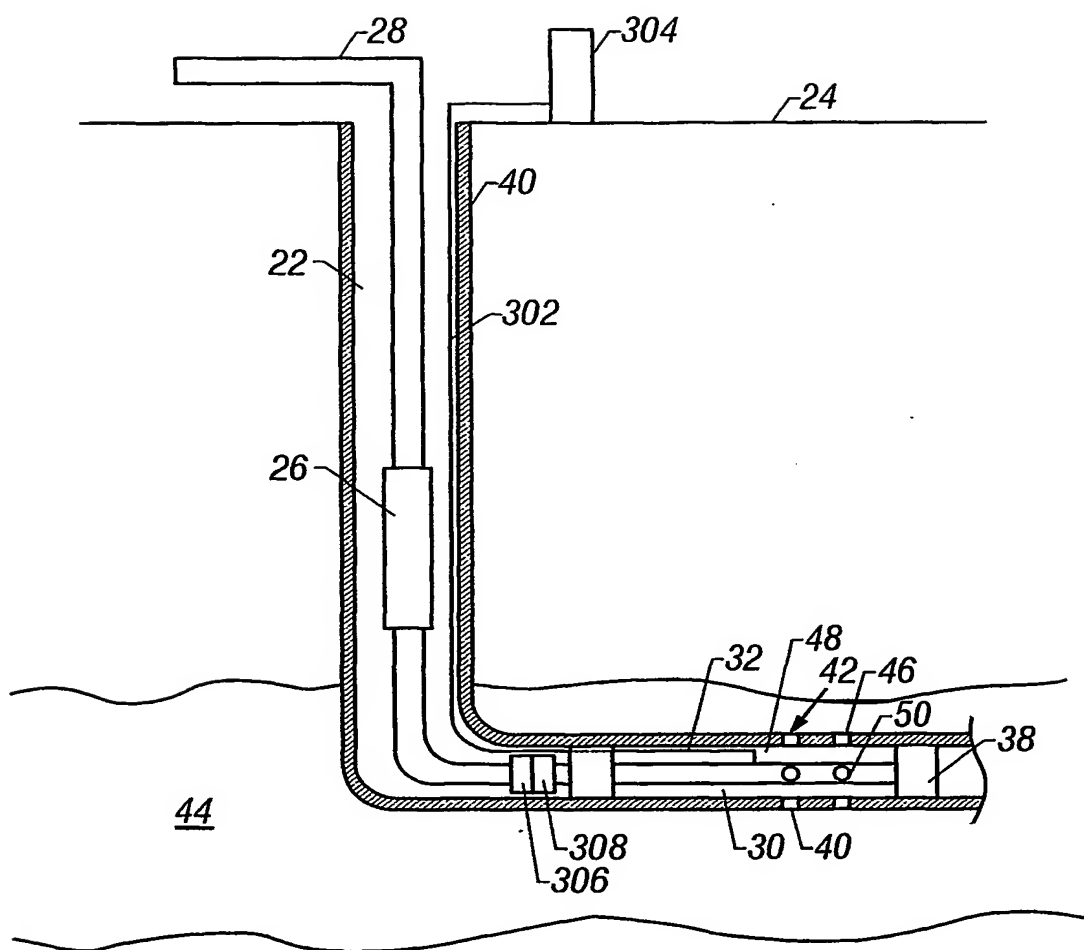

19/19

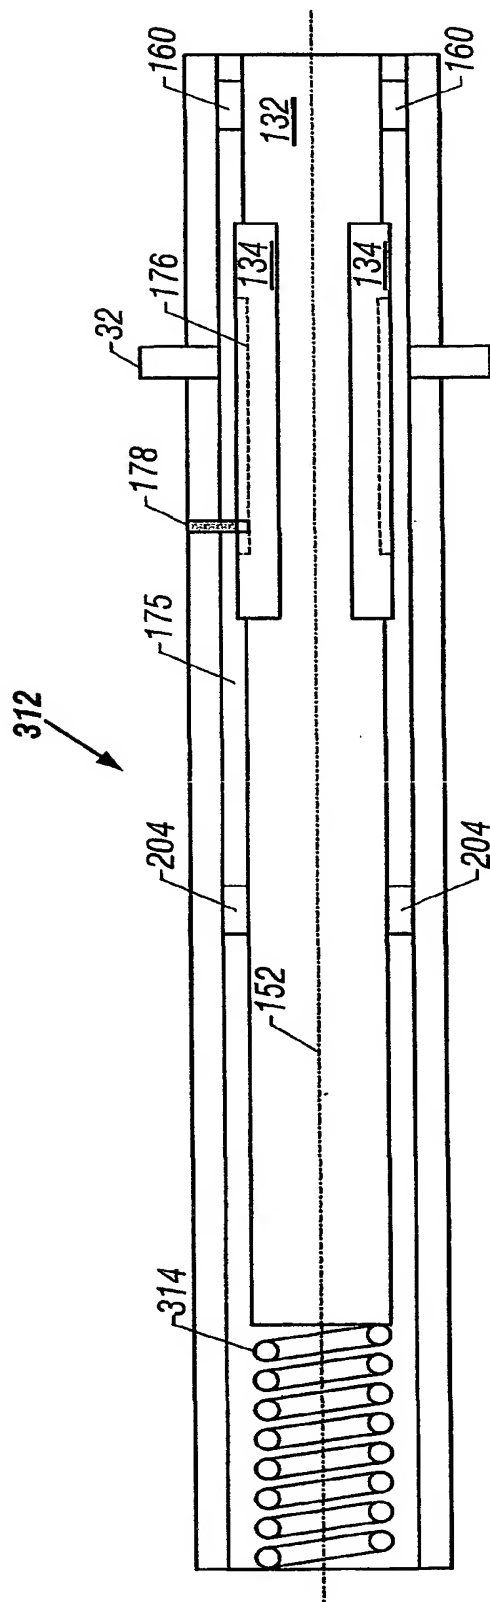

INTERNATIONAL SEARCH REPORT

International application No
PCT/US00/26178

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : E21B 34/10

US CL : 166/142, 319

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 166/142, 319, 330, 332.1, 332.5

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WEST

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,156,207 A (Haugen et al) 20 October 1992, Figs. 1-5, 10-15, 19, and 20, and entire document.	1-3, 5, 9, 14-17, 19, 22, 23, 30-32, 36, 38-44, 49-51
Y		4, 6-8, 10-13, 18, 20, 21, 24-29, 33-35, 37, 45-48, 52, 53

☒ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
B earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Z* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

20 NOVEMBER 2000

Date of mailing of the international search report

04 JAN 2001

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

FRANK S. TSAY

Diane Smith

Telephone No. (703) 308-2170

INTERNATIONAL SEARCH REPORT

International application No.
PCT US00:26178

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,325,917 A (Szarka) 05 July 1994, Figs. 5A-5D, 7E-7G, and entire document.	1-3, 9, 14-17, 19, 22, 23, 30-32, 36, 38-44, 49-51
Y		4, 6-8, 10-13, 18, 20, 21, 24-29, 33-35, 37, 45-48, 52, 53
Y	US 5,826,652 A (Tapp) 27 October 1998, entire document.	4, 6-8, 10-13, 18, 20, 21, 24-29, 33-35, 37, 45-48, 52, 53
Y	US 4,979,561 A (Szarka) 25 December 1990, entire document.	4, 6-8, 10-13, 18, 20, 21, 24-29, 33-35, 37, 45-48, 52, 53
Y, P	US 6,044,908 A (Wyatt) 04 April 2000, entire document.	4, 6-8, 10-13, 18, 20, 21, 24-29, 33-35, 37, 45-48, 52, 53
X	US 4,782,896 A (Witten) 08 November 1988, entire document.	1-3, 5, 9, 14-17, 19, 22, 23, 30-32, 36, 38-44, 49-51
Y		4, 6-8, 10-13, 18, 20, 21, 24-29, 33-35, 37, 45-48, 52, 53